




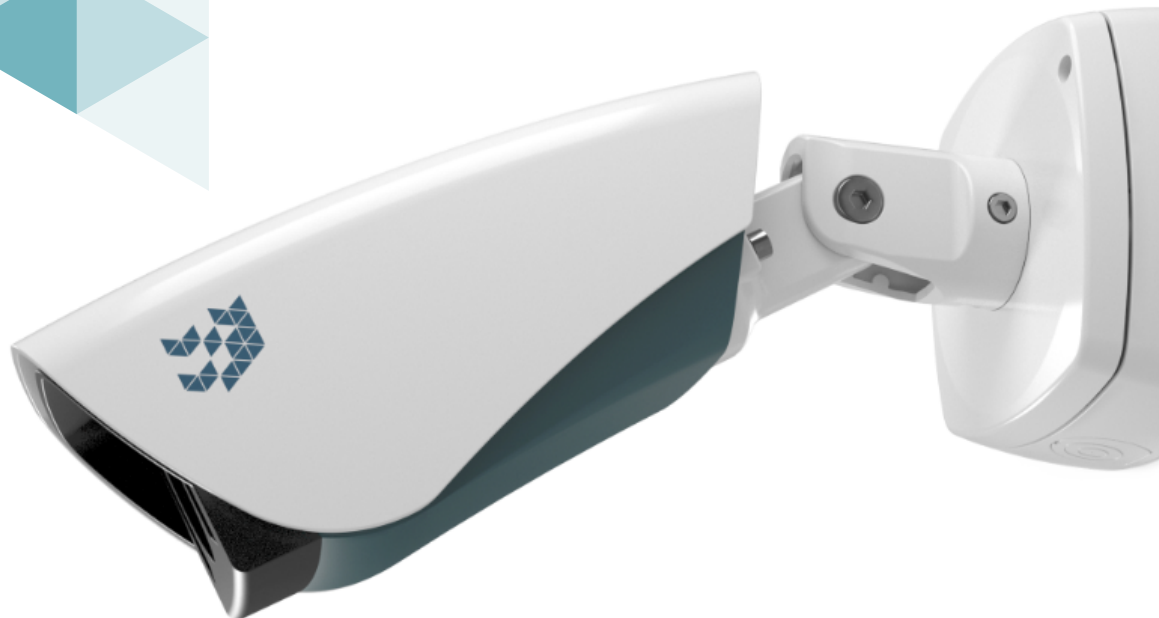

Kiara Pro-View

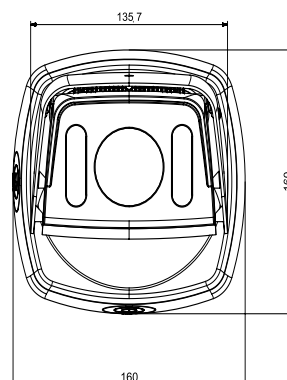

KIARA is a bullet camera characterized by its robust housing **IP68 and IK10 rated**. Designed to withstand the most hostile of environments, KIARA is available in **2 Mp, 5 Mp and 4K versions**. The camera combines modern functional designs and advanced technical features to fit a multitude of purposes. **ONVIF S and T** profiles compliance makes the integration in third-party solutions easy.

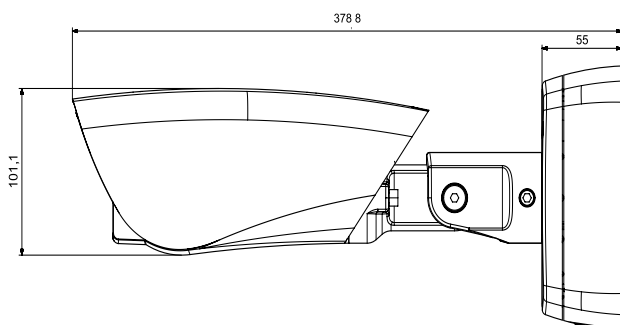

Camera Features			
Camera Model	KIARA 2000	KIARA 5000	KIARA 8000
Camera Code	SR-C-S2-KIARA-V12(V22)-IR	SR-C-S5-KIARA-V10-IR	SR-C-S8-KIARA-V10-IR
Image sensor	Exmor™ Starvis™ CMOS progressive Scan 1/2,8"	Exmor™ Starvis™ CMOS progressive Scan 1/1,8"	Exmor™ Starvis™ CMOS progressive Scan 1/2,5"
Electronic shutter	1/2s – 1/30000s		
Min. illumination	0.001 lux @ F1.4 (color) 0.0001Lux @ F1.4 (B/W)	0.05 lux @ F1.5 (color) 0.005 lux @ F1.5 (B/W)	
Lens	2.8-12mm, F1.4 (7-22mm) FOV: 33° - 104° (14° - 43°)	3.6-10mm, F1.5 FOV: 38° - 85°	3.3-10mm, F1.3 FOV: 38° - 95°
	Varifocal, Autofocus, Focus e remote zoom, P-Iris, IR Correction		

Video			
Camera Model	KIARA 2000	KIARA 5000	KIARA 8000
Day & Night	IR Correction, Removable IR cut filter Adaptive IR light (up to 50 mt)		
Video Compression	H.265,H.264 high/main/basic profile, Motion JPEG		
Image Resolution	Up to 1920x1080	Up to 2560x1920	Up to 3840 x 2160
Frame rate	Up to 60 fps (WDR off) Up to 30 fps (WDR on)	Up to 60 fps (with 2MP 1980X1080 resolution)	
Video Bitrate	256 Kbps - 30Mbps		
WDR	120 dB	120 dB	
Streaming protocol	RTSP/HTTP, RTSP/TCP, RTSP/UDP, Unicast, Multicast		
Streaming mode	Multiple video streams individually configurable, configuration of frame rate and bandwidth		
Image setting	3D Denoise, Brightness, Color, Sharpness, White Balance, Compression, Exposure control (auto/manual), Privacy masks, ROI, Defog, Image Flip and Mirror, 90° and 270° Image Rotation, Text overlay		

Network	
Security	Password protection , HTTPS encryption, digest authentication, IP filtering, Lock on login fails
Network protocols	IPv4, IPv6, DHCP, DNS, DDNS, NTP, UPnP, Bonjour, Ping, SMB/CIFS, NFS,HTTP, HTTPS, RTP, RTSP, TCP, UDP, SSH
ONVIF	Profile S, Profile T

Audio	
Audio	Two-way full duplex
Audio compression	G.711 U law, a law, g.726, AMR
Audio connectors	Line-IN, Line-OUT

System integration	
Analitiche	Tripwire detection, perimeter detection, tampering detection, people density, motion detection, audio detection
Events	Video Analytics Events, I/O Alarms, Network Link Down, Periodical Events
Events actions	HTTP/HTTPS/FTP file upload, Email notification, Video recording, Snapshot, I/O notification
Built-in installation	Remote Focus and Zoom, Auxiliary wi-fi 802.11 b/g/n connection
Data streaming	Stream Video, Events metadata

General	
Size	379x101x136 mm
Weight	2.5 Kg
Housing	Diecast aluminium, Plastic, Polycarbonate
Ingress protection	IK10
Impact protection	IP68
Protective vent	IP68, high permeability
Memory	RAM 512MB,Flash 32MB
Network connector	10/100 RJ45 PoE
I/O	2 Optoisolated (3KV) Digital Inputs, 1 Digital Output Relais (24VDC 2A)
Power	PoE IEEE 802.3 af 12Vdc 25W
Serial commucation	RS485 Half duplex
Power source connector	Terminal Block
Operating temperature	-40°C, +60°C Protection in case of overheating
Min. Booting temperature	-20°C
Compliance	EN 55032 (2015-07) EN 55024 (2010-11) +A1 (2013) EN 50130-4 (2011-06) + A1 (2014)
Language	Italian, English, more on request

UNICA backplate	
Edge storage	MicroSD/SDHC up to 128GB
Installation	SPARK fastlock
Recovery	Embedded EEPROM
Wall mount	UNICA



SPARK
VIA ANTONIO GRAMSCI, 86/A
42124 REGGIO EMILIA
P. +39.0522.1715150
F. +39.0522.1715151

P. IVA/C.F. 02542850355
R.E.A. di RE n. 291049
www.spark-security.com
info@spark-security.com

© 2013 - 2021 SPARK. All rights reserved. Unless expressly permitted in writing, no license is granted in relation to any copyright, industrial design, trademark, patent or other intellectual property rights of SPARK or its licensors. The information contained in this document may change without notice.document may change without notice.